


UDDERLY COLD MILK CHILLER SIZES & SPECIFICATIONS

PROJECT _____

ITEM # _____

| MODEL | UCM SERIES | | | | |
|-------------------------|--|------------|------------|---------------|---|
| | UCM-33 HGB | UCM-50 HGB | UCM-75 HGB | UCM-75 HGB HA | |
| COMPRESSOR SIZE | 1/3 H.P. | 1/2 H.P. | 3/4 H.P. | | |
| BTU RATING | 3,400 | 4,400 | 6,100 | 6,500 | |
| MAX HEAT REJECTION | 5,100 | 6,600 | 9,150 | 9,750 | |
| WATER USAGE | FOR WATER COOLED CONDENSERS ONLY MINIMUM FLOW RATE OF ONE GALLON PER MINUTE REQUIRED SEE UNIT BENEFITS & OPTIONS PAGE FOR ADDITIONAL INFORMATION | | | | |
| REFRIGERANT TYPE | R-404A | | | | |
| REFRIGERANT CHARGE | 19 oz | 24 oz | 30 oz | 43 oz | |
| GLYCOL CIRCULATING PUMP | 100 GPH POSITIVE DISPLACEMENT | | | | |
| GLYCOL RESERVOIR | 2 GALLONS | | | | |
| ELECTRICAL INFORMATION | VOLTAGE | 120V | | 208/230V | |
| | FREQUENCY | 60 Hz | | | |
| | PHASE | 1Ø | | | |
| | FULL LOAD AMPS | 12 | 15 | 8 | 9 |
| | BREAKER SIZE | 20AMP | | | |
| | NEMA PLUG TYPE | 5-20P | | 6-20P | |
| EXTERIOR DIMENSIONS | LENGTH - "A" | 33" | | | |
| | WIDTH - "B" | 27" | | | |
| | HEIGHT - "C" | 17" | | 27" | |
| SHIPPING WEIGHT - LBS | 140 | 150 | 160 | 175 | |

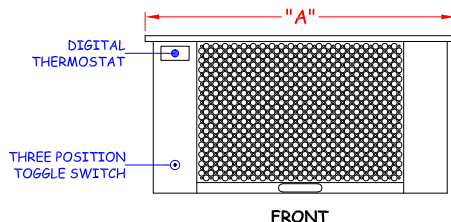

UDDERLY COLK MILK SERIES

